

## 监听音箱系列

### RS-122M

#### 12" TWO-WAY STAGE MONITOR

#### 单12"监听型两分频全音域音箱




FREQUENCY RANGE	频率响应	35-20KHz
POWER HANDLING	标称功率	400W
NOMINAL IMPEDANCE	标称阻抗	8 ohm
SENSITIVITY ( dB/1m1w )	灵敏度	100dB
NOMINAL DISPERSION	散射角度	80° x 50°
DIMENSIONS ( H*W*D )	箱体尺寸	435 x 640 x 360mm
NET WEIGHT	净重	29.5kg

The RS-122M is a full range, 2-way stage /floor monitor system in a computer optimized enclosure. Loudspeaker compliment consists of a single 12" LF woofer in a ported sub-enclosure, and 1" compression driver mounted to a 80o x 50o horn. An optimized switchable biamp to passive crossover network is included standard. The enclosure is constructed of durable 18mm void-free MDF laminate, daddoed for strength and durability. Perforated steel is employed for frontal protection of the loudspeaker compliment.


#### 使用范围

舞台演出监听、录音室监听

#### Response data

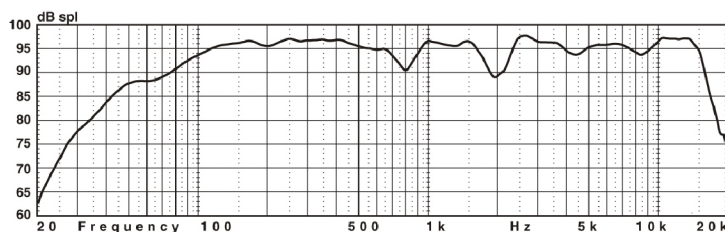

on axis response (2.83v@1m. free-field conditions)

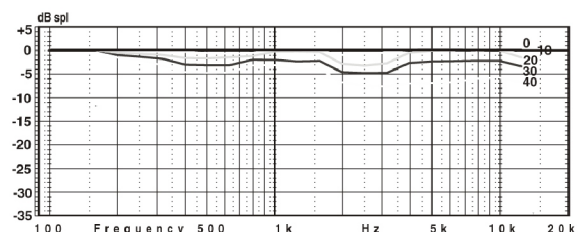

off axis response (normalized to on axis response)