

## SR 音箱系列

### SR-12

#### 12" TWO-WAY SPEAKER SYSTEM

#### 单12"两分频全音域音箱




FREQUENCY RANGE	频率响应	35-20KHz(-6dB)
POWER HANDLING	标称功率	350W Rms
MIX POWER	最大功率	600W
NOMINAL IMPEDANCE	标称阻抗	8 ohm
SENSITIVITY ( dB/1m1w )	灵敏度	100dB
RATED MAXIMONSPL	最高声压	124dB
	分频点	1.6KHz
NOMINAL DISPERSION	散射角度	90° x 60°
DIMENSIONS ( H*W*D )	箱体尺寸	640 x 415 x 400mm
NET WEIGHT	净重	39kg

The SR-12 is a 2-way full range system in a trapezoidal, computer optimized enclosure. Loudspeaker compliment consists of an 12" LF woofer in a ported sub-enclosure, and a single 1"compression driver mounted on a 90o x 40o horn. A factory optimized internal crossover is installed to ensure balanced output between the HF and LF components. The enclosure is constructed of durable 18mm void-free MDF laminate, dadoed for strength and durability. Integrated eyebolt receptacles are located on the top of the system to facilitate a vertical installation. Perforated steel is employed for frontal protection of the loudspeaker compliment.


#### 使用范围

会议室、宴会厅、教室、演艺厅、的士高、慢遥吧、卡拉OK、礼堂、教堂、俱乐部、会所

#### Response data

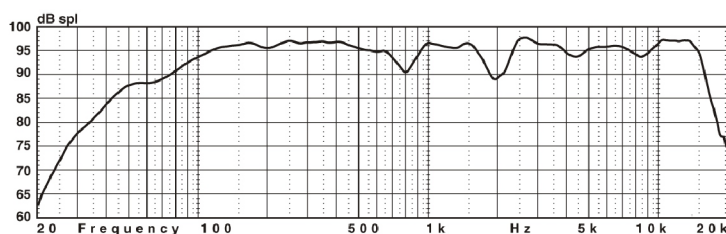

on axis response (2.83v@1m. free-field conditions)

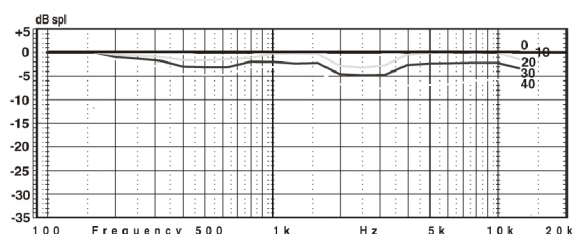

off axis response (normalized to on axis response)