

SR 音箱系列

SR-25

DUAL 15"THREE-WAY SPEAKER SYSTEM 双15"三分频全音域音箱




FREQUENCY RANGE	频率响应	30-20KHz(-6dB)
POWER HANDLING	标称功率	700W Rms
MIX POWER	最大功率	1200W Rms
NOMINAL IMPEDANCE	标称阻抗	8 ohm
SENSITIVITY (dB/1m1w)	灵敏度	102dB
RATED MAXIMONSPL	最高声压	130dB-6dB
	分频点	1.5KHz/9KHz
NOMINAL DISPERSION	散射角度	90° x 60°
DIMENSIONS (H*W*D)	箱体尺寸	1240 x 525 x 500mm
NET WEIGHT	净重	70kg

The SR-25 is a 3-way full range system in a computer optimized enclosure. Loudspeaker compliment consists of twin proprietary midrange 15", individually loaded into separate subcompartments, and a single 1"compression driver mounted on a 90x40o horn. The enclosure is constructed of durable 18mm void-free MDF laminate, dadoed for strength and durability. Perforated steel is employed for frontal protection of the loudspeaker compliment.


使用范围

会议室、宴会厅、教室、演艺厅、的士高、慢遥吧、卡拉OK、礼堂、教堂、俱乐部、会所

Response data

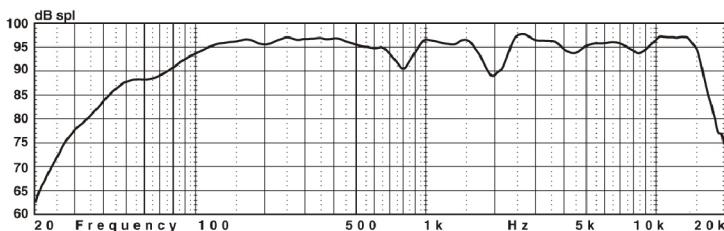

on axis response (2.83v@1m, free-field conditions)

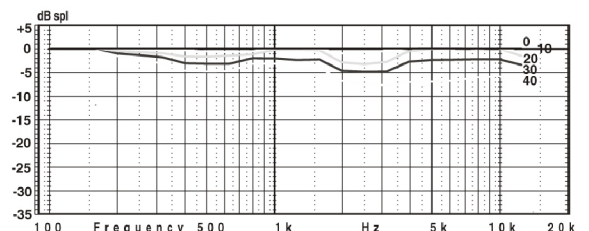

off axis response (normalized to on axis response)