


► **INSTALLATION PRODUCTS**

SR 音箱系列

SR-12



SR-15

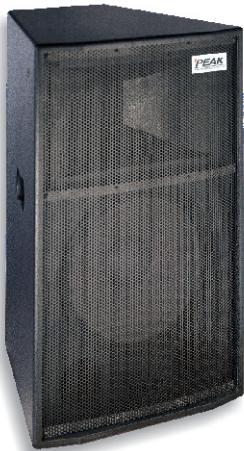

SR-25



12" TWO-WAY SPEAKER SYSTEM

单12"两分频全音域音箱

FREQUENCY RANGE	频率响应	70~20KHz (-10dB)
POWER HANDLING	标称功率	220W
NOMINAL IMPEDANCE	标称阻抗	8 ohm
SENSITIVITY (dB/1m1w)	灵敏度	96dB
NOMINAL DISPERSION	散射角度	90° × 40°
DRIVER COMPLEMENT	单体组合	12" Cone Driver 1" Dome Tweeter
DIMENSIONS (H*W*D)	箱体尺寸	640 × 415 × 400mm
NET WEIGHT	净重	39kg

The SR-12 is a 2-way full range system in a trapezoidal, computer optimized enclosure. Loudspeaker compliment consists of an 12" LF woofer in a ported sub-enclosure, and a single 1" compression driver mounted on a 90° × 40° horn. A factory optimized internal crossover is installed to ensure balanced output between the HF and LF components. The enclosure is constructed of durable 18mm void-free MDF laminate, dadoed for strength and durability. Integrated eyebolt receptacles are located on the top of the system to facilitate a vertical installation. Perforated steel is employed for frontal protection of the loudspeaker compliment.

15" TWO-WAY SPEAKER SYSTEM

单15"两分频全音域音箱

FREQUENCY RANGE	频率响应	40~20KHz (-10dB)
POWER HANDLING	标称功率	320W
NOMINAL IMPEDANCE	标称阻抗	8 ohm
SENSITIVITY (dB/1m1w)	灵敏度	97dB
NOMINAL DISPERSION	散射角度	90° × 40°
DRIVER COMPLEMENT	单体组合	15" Cone Driver 1" Dome Tweeter
DIMENSIONS (H*W*D)	箱体尺寸	840 × 525 × 500mm
NET WEIGHT	净重	50kg

The SR-15 is a 2-way full range system in a trapezoidal, computer optimized enclosure. Loudspeaker compliment consists of an 15" LF woofer in a ported sub-enclosure, and a single 1" compression driver mounted on a 90° × 40° horn. A factory optimized internal crossover is installed to ensure balanced output between the HF and LF components. The enclosure is constructed of durable 18mm void-free MDF laminate, dadoed for strength and durability. Integrated eyebolt receptacles are located on the top of the system to facilitate a vertical installation. Perforated steel is employed for frontal protection of the loudspeaker compliment.

DUAL 15" TWO-WAY SPEAKER SYSTEM

双 15"两分频全音域音箱

FREQUENCY RANGE	频率响应	40~20KHz (-10dB)
POWER HANDLING	标称功率	550W
NOMINAL IMPEDANCE	标称阻抗	4 ohm
SENSITIVITY (dB/1m1w)	灵敏度	99dB
NOMINAL DISPERSION	散射角度	90° × 40°
DRIVER COMPLEMENT	单体组合	15" Cone Driver 1" Dome Tweeter
DIMENSIONS (H*W*D)	箱体尺寸	1240 × 525 × 500mm
NET WEIGHT	净重	70kg

The SR-25 is a 2-way full range system in a computer optimized enclosure. Loudspeaker compliment consists of twin proprietary midrange 15"s, individually loaded into separate subcompartments, and a single 1" compression driver mounted on a 90°×40° horn. The enclosure is constructed of durable 18mm void-free MDF laminate, dadoed for strength and durability. Perforated steel is employed for frontal protection of the loudspeaker compliment.